




DECLARATION OF PERFORMANCE OF THE „ARPANEL” SANDWICH PANEL

NO. DWU/SU/PIR/2.1/2024/EN

1	Name and address of manufacturer	Adamietz Sp. z o.o. 47 – 100 Strzelce Opolskie ul. Braci Prankel 1 Poland
2	Unique identification code of the product-type	ARPANEL SU 60 PIR, ARPANEL SU 80 PIR, ARPANEL SU 100 PIR, ARPANEL SU 120 PIR SANDWICH PANELS with polyisocyanurate foam core
3	Intended use, in accordance with the applicable harmonized technical specification	Metal faced insulating panel for use in buildings as external walls and partitions
4	System of assessment and verification of constancy of performance:	System 3
5	Harmonized standard	PN-EN 14509:2013 – 12
6	Notified body	- INSTYTUT TECHNIKI BUDOWLANEJ Warsaw - No. 1488 - IMA Materialforschung und Anwendungstechnik GmbH Dresden – No. 2456 - Fires s.r.o. Batizovce – No. 1396
7	Declared performance	Annex 1.

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

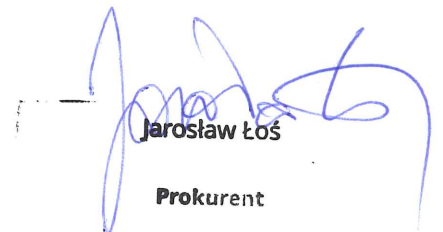

Jarosław Łoś
Prokurent

Strzelce Opolskie, 18-11-2024

ARPANEL - Sandwich panels

Adamietz Sp. z o.o.

47-100 Strzelce Opolskie

ul. Braci Prankel 1

NIP [Tax Id. No.]: 756-18-36-633

REGON [Statistical Id. No.]:

532242263

tel. +48 77 463 00 55

fax. +48 77 463 92 00

email: biuro@arpanel.pl

District Court Of Law In Opole, 7th Commercial

Division, National Court Register No.: 0000100273

Share capital: 2.330.000,00 PLN

www.arpanel.eu

**Annex 1 to the Declaration of performance NO. DWU/SU PIR/2.1/2024/EN**

Panel thickness [mm]			60	80	100	120	
Dimensional tolerances			± 2 mm		± 2 %		
Mass [kg/m2]			10,8	11,6	12,4	13,2	
Density of core material (PIR foam) [kg/m³]			40±3				
External/Internal Facing - Steel grade			S280GD+Z; S250GD+Z; S220GD+Z				
Coating type			SP25, Food Safe (PVC), PRISMA, HDX, PVDF, PUR/PA				
Thickness of facing material [mm]			External: 0,5 - 0,7		Internal: 0,4 – 0,7		
Facing profile			External: G, L , M8, M14, M30		Internal: G, L, M20		
Cross panel tensile strength f _{ct} [kPa]			100	100	100	100	
Compressive strength (core) f _{cc} [kPa]			100	100	100	100	
Shear strength (core) f _{cv} [kPa]			120	120	120	120	
Shear modulus (core) G _c [MPa]			3,1	3,1	3,1	3,1	
Wrinkling stress [MPa]	in span	external face	M8/M14:160	M8/M14:172	M8/M14:183	M8/M14:195	
			M30: 157	M30: 166	M30: 175	M30: 184	
			L:134 G:63	L:134 G:63	L:134 G:63	L:134 G:63	
		external face >80°C	M8/M14:130	M8/M14:139	M8/M14:149	M8/M14:158	
			M30: 127,3	M30: 134,5	M30: 141,8	m30: 149	
			L:109 G:51	L:109 G:51	L:109 G:51	L:109 G:51	
		internal face	L:134 G:63	L:134 G:63	L:134 G:63	L:134 G:63	
			M20:184	M20:184	M20:184	M20:184	
			At central support	external face	M8/M14:123	M8/M14:128	M8/M14:132
	M30: 120,8	M30: 123,5			M30: 126,3	M30: 129	
	L:98 G:44	L:96 G:44			L:93 G:44	L:90 G:44	
	external face >80°C	M8/M14:100		M8/M14:104	M8/M14:107	M8/M14:111	
		M30: 98		M30: 100	M30: 102	M30:104	
		L:79 G:36		L:77 G:36	L:75 G:36	L:73 G:36	
	internal face	L:119 G:54		L:118 G:54	L:116 G:54	L:114 G:54	
		M20:150		M20:145	M20:139	M20:133	
		Correction factors for the thickness of the facing		t=0,6 mm for M8/14: 0,85 for M20/M30: 0,83 for L: 0,84 t=0,7 mm for M8/14:0,76 for M20/M30:0,74 for L: 0,75			
	Thermal conductivity λ _D [W/m*K]			0,022			
	Thermal transmittance U _{d,s} [W/m²*K]			0,40	0,29	0,23	0,19
	Reaction to fire			B-s1,d0			
Fire resistance*	Vertical	NPD			E 30 / EI 20 / EW 30	E30 / EI 30 / EW 30	
	Horizontal	NPD			E30 / EI20 / EW 30		
Water permeability [class]			A				
Air permeability	Positive pressure	C = 0,1136; n = 0,2931					
	Negative pressure	C = 0,2451; n = 0,1187					
Airborne sound insulation R _w (C, Ctr) [dB]			25 (-2;-4)				
Sound absorption α _w			0,15				
Additional performance not included in the list of relevant clauses in accordance with PN-EN 14509:							
Parameter			Value				
Fire-spread			non-fire spreading				